
Trimless recessed luminaire

Simple Round A56 D68 11W 930 DA ze11006958

×

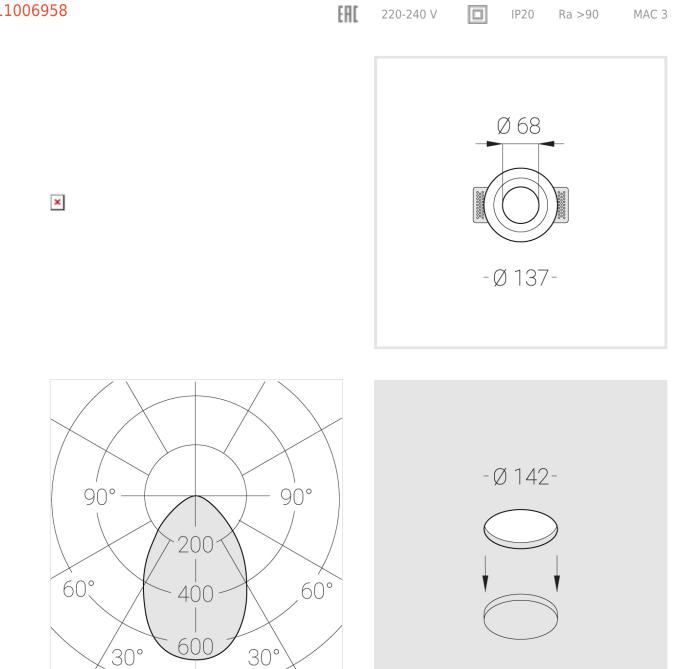

×

Complectation

Body	1
LED module	1
Conrol gear	1
Fastener	2
Screw x6	4
Screw self-tapping	2
Washer D5	4
Suction Cup	1

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

Illuminant:LEDElectrical safety class:IIDegree of protection:IP20Rated power:11.2 wLuminaire luminous flux*:703 lmLight output*:63 lm/wColorful temperature*:3000 KColor rendering index*:Ra >90Color temperature stability*:MAC 3	Measurements: Net weight:	D137x96 mm 0.75 kg
Degree of protection:IP20Rated power:11.2 wLuminaire luminous flux*:703 lmLight output*:63 lm/wColorful temperature*:3000 KColor rendering index*:Ra >90Color temperature stability*:MAC 3	Body:	Gypsum LED
	Degree of protection: Rated power: Luminaire luminous flux*: Light output*: Colorful temperature*: Color rendering index*: Color temperature stability*: cos *:	II IP20 11.2 w 703 Im 63 Im/w 3000 K Ra >90 MAC 3 0.96 LCA 10W 150-400mA one4all SC PRE

All parameters marked with * are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 ** — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.

zenit-stp.com