

# Trimless recessed luminaire

Simple Quadro A56 100x100 12W 830  
ze11005001







220-240 V



IP20

Ra >80

MAC 3

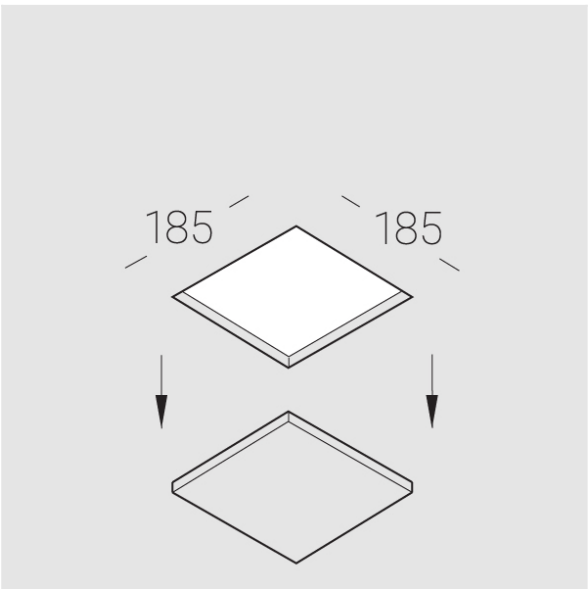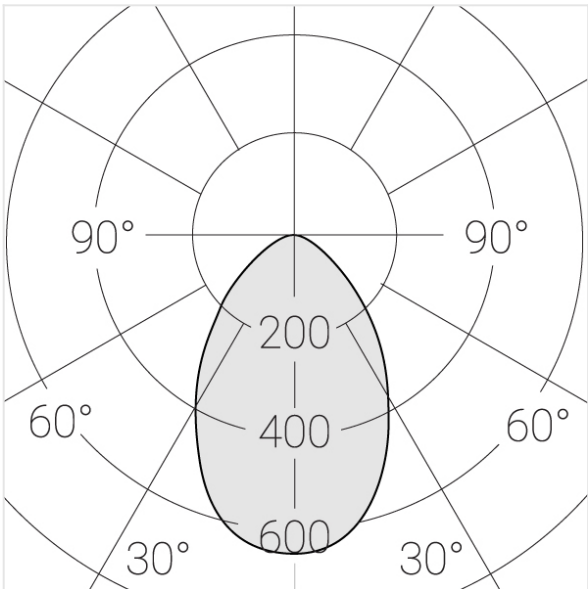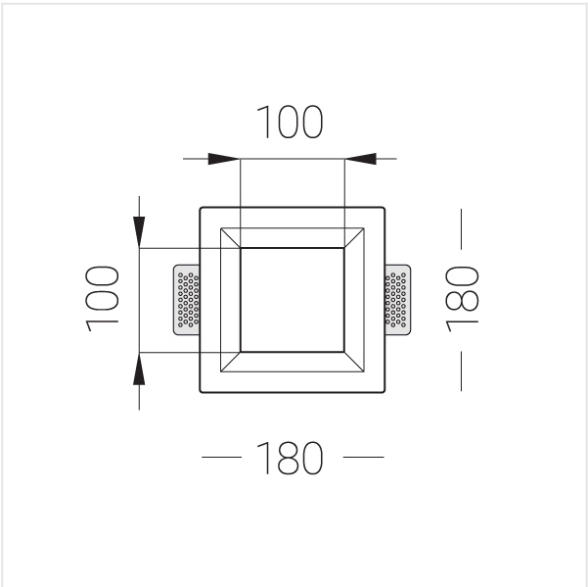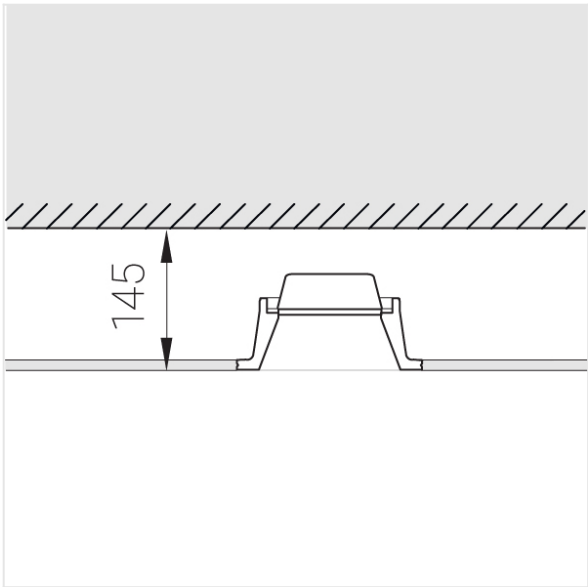

## Complectation

|                    |   |
|--------------------|---|
| Body               | 1 |
| LED module         | 1 |
| Conrol gear        | 1 |
| Fastener           | 2 |
| Screw x6           | 4 |
| Screw self-tapping | 2 |
| Washer D5          | 4 |

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

## Specifications

|                               |                           |
|-------------------------------|---------------------------|
| Measurements:                 | 180x180x96 mm             |
| Net weight:                   | 1.35 kg                   |
| Square                        |                           |
| Body:                         | Gypsum                    |
| Illuminant:                   | LED                       |
| Electrical safety class:      | II                        |
| Degree of protection:         | IP20                      |
| Rated power:                  | 11.9 w                    |
| Luminaire luminous flux*:     | 1113 lm                   |
| Light output*:                | 94 lm/w                   |
| Colorful temperature*:        | 3000 K                    |
| Color rendering index*:       | Ra >80                    |
| Color temperature stability*: | MAC 3                     |
| cos *:                        | 0.54                      |
| PRA:                          | LC 10/250/40 fixC SR SNC2 |

All parameters marked with \* are calculated values.  
Zenith uses tried and tested components from leading suppliers.  
However, it is possible for some LED technology-related faults to occur over the life of the product.

\*\* — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.