Trimless recessed luminaire

Luno Quadro C85 100x100 12W 830

ze11005241
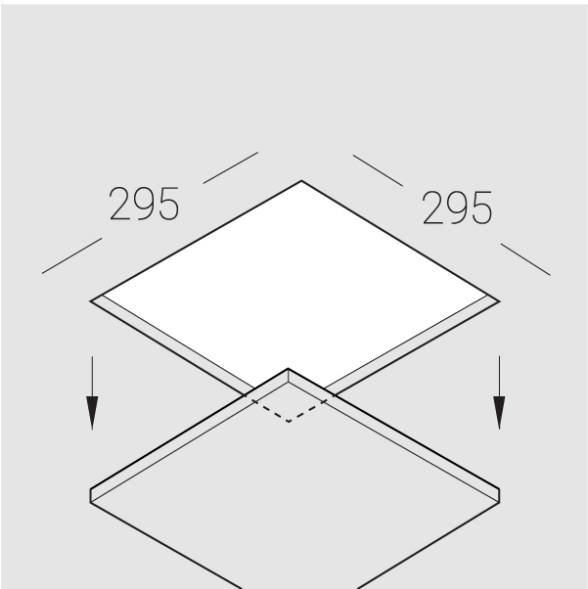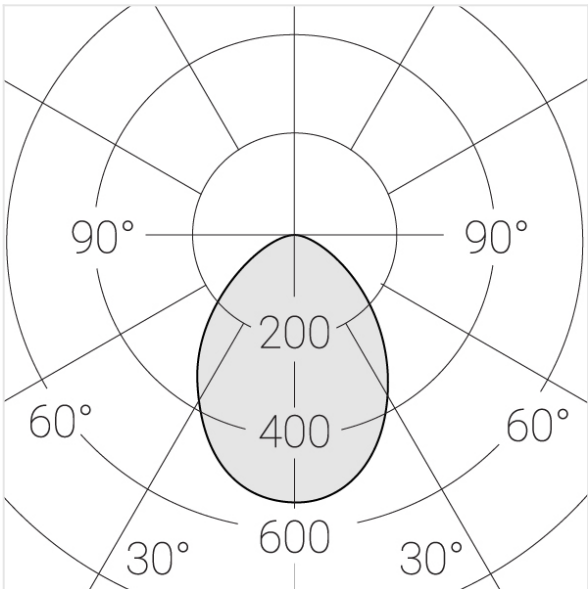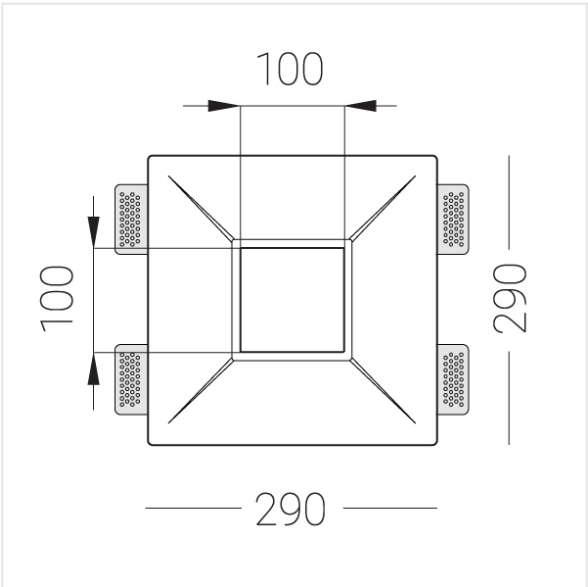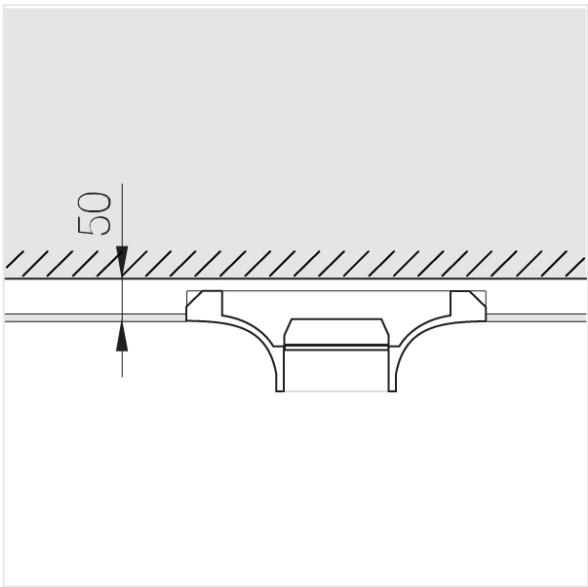
EAC   220-240 V   □   IP20   Ra >80   MAC 3

100

100   290

290

90°   90°

200

60°   400   60°

600

30°   30°

295   295

Complectation

Body	1
LED module	1
Conrol gear	1
Fastener	4
Screw x6	8
Screw self-tapping	4
Washer D5	8

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

Measurements:	290x290x123 mm
Net weight:	2.81 kg
Square	
Body:	Gypsum
Illuminant:	LED
Electrical safety class:	II
Degree of protection:	IP20
Rated power:	11.9 w
Luminaire luminous flux*:	1012 lm
Light output*:	85 lm/w
Colorful temperature*:	3000 K
Color rendering index*:	Ra >80
Color temperature stability*:	MAC 3
cos *:	0.54
PRA:	LC 10/250/40 fixC SR SNC2

All parameters marked with * are calculated values.
Zenith uses tried and tested components from leading suppliers.
However, it is possible for some LED technology-related faults to occur over the life of the product.

** — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.