

# Trimless recessed luminaire

Luno Quadro C85 100x100 12W 830 DA  
ze11005271







220-240 V



IP20

Ra >80

MAC 3

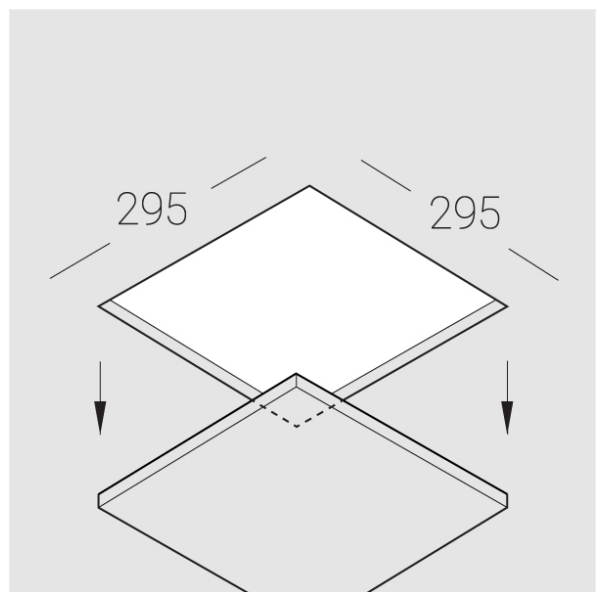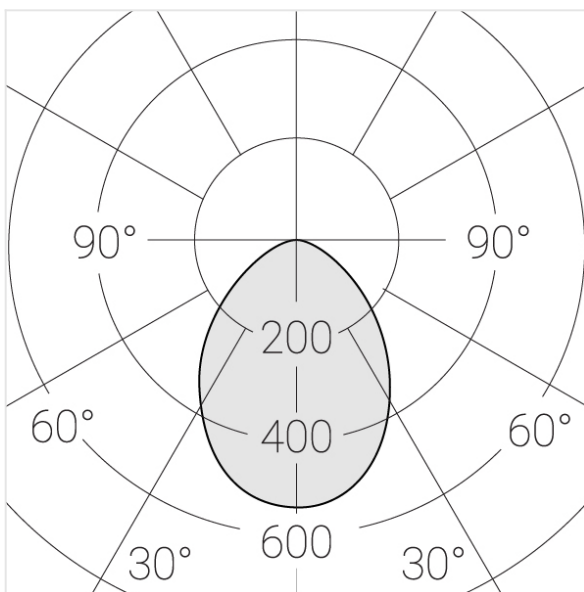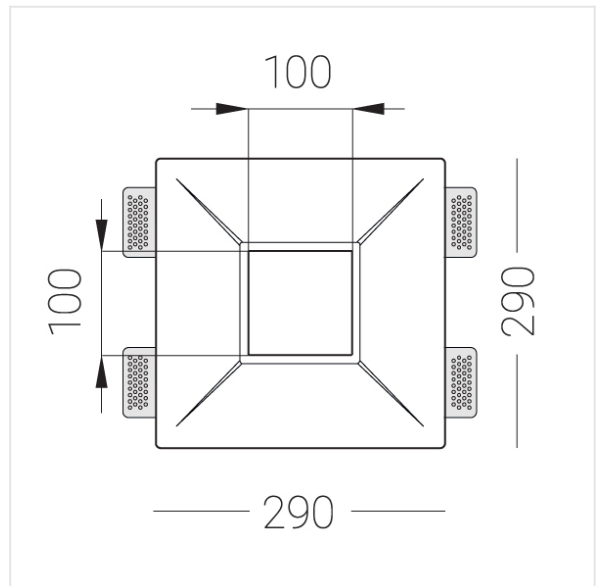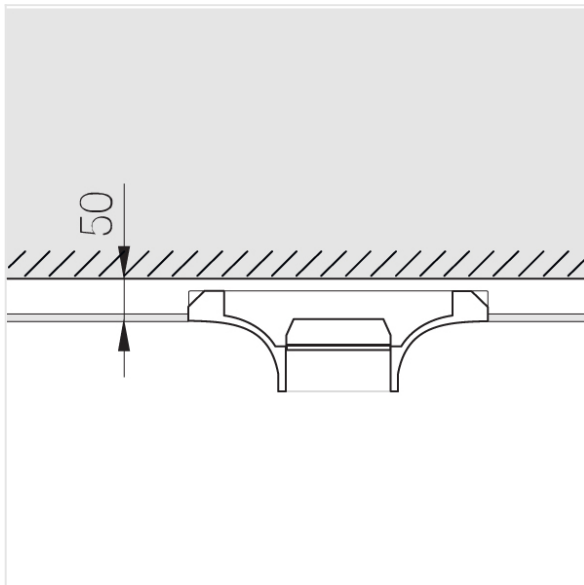

## Complectation

Body	1
LED module	1
Conrol gear	1
Fastener	4
Screw x6	8
Screw self-tapping	4
Washer D5	8

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

## Specifications

Measurements:	290x290x123 mm
Net weight:	2.84 kg
Square	
Body:	Gypsum
Illuminant:	LED
Electrical safety class:	II
Degree of protection:	IP20
Rated power:	12.2 w
Luminaire luminous flux*:	1012 lm
Light output*:	83 lm/w
Colorful temperature*:	3000 K
Color rendering index*:	Ra >80
Color temperature stability*:	MAC 3
cos *:	0.8
PRA:	LCAI 15W 150mA-400mA ECO slim

All parameters marked with \* are calculated values.  
Zenith uses tried and tested components from leading suppliers.  
However, it is possible for some LED technology-related faults to occur over the life of the product.  
  
\*\* — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.