Trimless recessed luminaire


400

30°

30°

Twins A25 16W 930 ze11009404

×

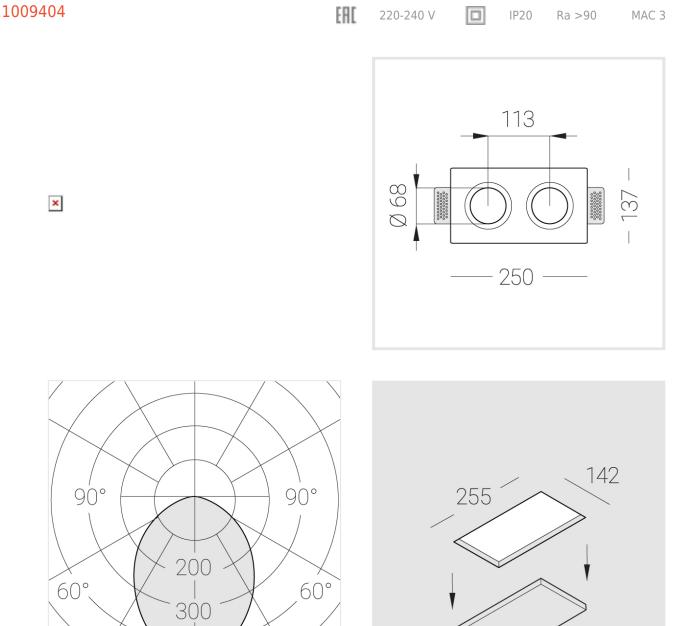

×

Complectation

| Body | 1 |
|--------------------|---|
| LED module | 2 |
| Conrol gear | 2 |
| Fastener | 2 |
| Screw x6 | 4 |
| Screw self-tapping | 2 |
| Washer D5 | 4 |
| Suction Cup | 1 |

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

| Measurements: Net weight: | 232x137x70 mm 1.44 kg |
|--------------------------------|--------------------------|
| Double Body: Illuminant: | Gypsum LED |
| | |
| Electrical safety class: | II |
| Degree of protection: | IP20 |
| Rated power: | 15.6 w |
| Luminaire luminous flux*: | 1102 lm |
| Light output*: | 71 lm/w |
| Colorful temperature*: | 3000 K |
| Color rendering index*: | Ra >90 |
| Color temperature stability*: | MAC 3 |
| COS *: | 0.4 |
| PRA: | Mean Well APC-8-250 |

All parameters marked with * are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 ** — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.

zenit-stp.com