

# Trimless recessed luminaire


Twins S05 22W 840 IP44/20 DW

ze11009777

220-240 V IP44 Ra >80 MAC 3

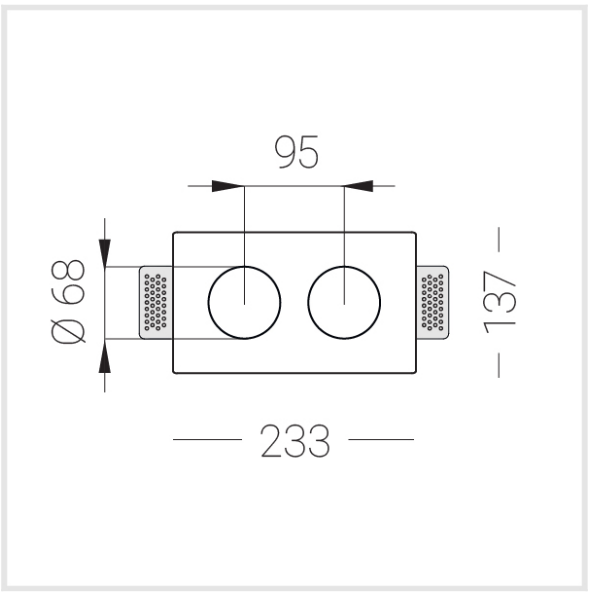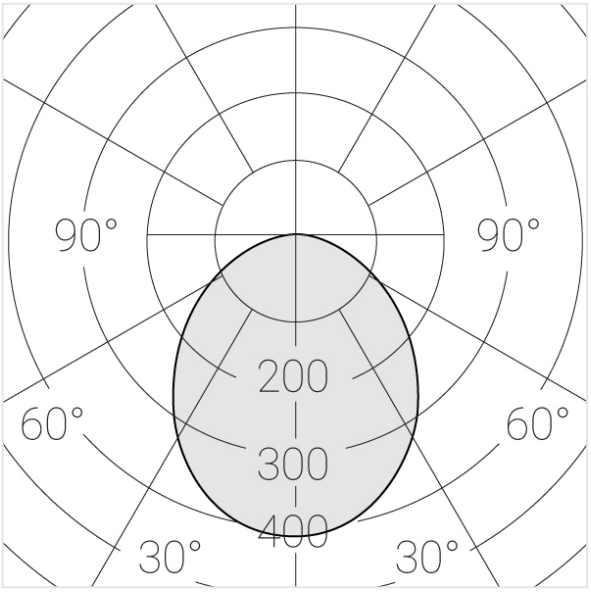

## Complectation
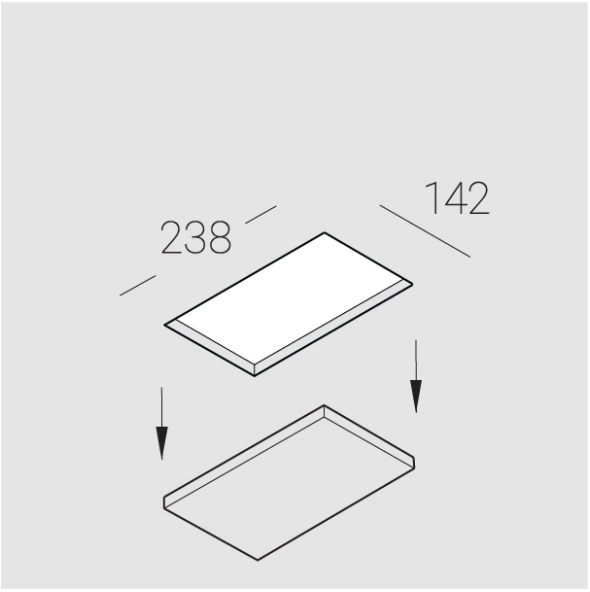
| | |
|---|---|
| Body | 1 |
| LED module | 2 |
| Conrol gear | 1 |
| Fastener | 2 |
| Screw x6 | 4 |
| Screw self-tapping | 2 |
| Washer D5 | 4 |
| Suction Cup | 1 |

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

## Specifications

| | |
|---|---|
| Measurements: | 232x137x50 mm |
| Net weight: | 1.21 kg |

Double

| | |
|---|---|
| Body: | Gypsum |
| Illuminant: | LED |

| | |
|---|---|
| Electrical safety class: | II |
| Degree of protection: | IP44 |
| Rated power: | 21.1 w |
| Luminaire luminous flux*: | 2086 lm |
| Light output*: | 99 lm/w |
| Colorful temperature*: | 4000 K |
| Color rendering index*: | Ra >80 |
| Color temperature stability*: | MAC 3 |
| cos *: | 0.93 |
| PRA: | LC 25/350-1050/50 bDW SC PRE2 |

All parameters marked with * are calculated values.
Zenith uses tried and tested components from leading suppliers.
However, it is possible for some LED technology-related faults to occur over the life of the product.

** — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.

© Zenit STP