

# Trimless recessed luminaire

Tetro A25 32W 930  
ze11009644






220-240 V



IP20

Ra >90

MAC 3

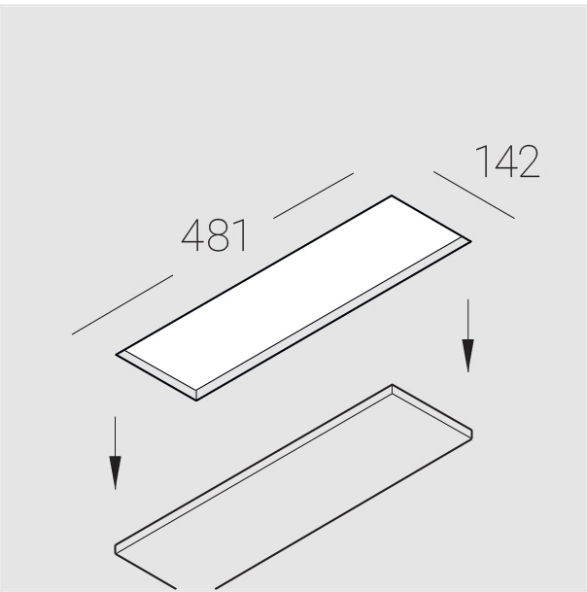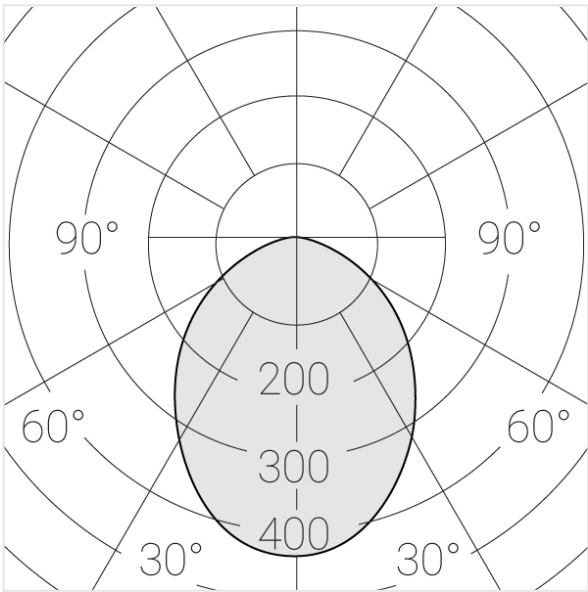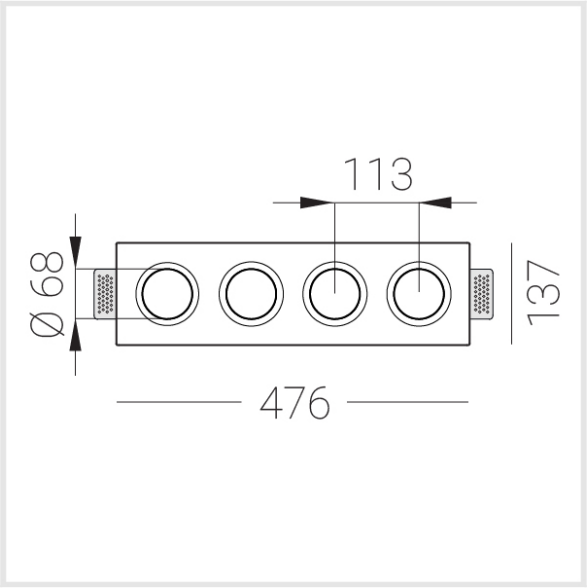

## Compelectionation

|                    |   |
|--------------------|---|
| Body               | 1 |
| LED module         | 4 |
| Conrol gear        | 4 |
| Fastener           | 2 |
| Screw x6           | 4 |
| Screw self-tapping | 2 |
| Washer D5          | 4 |
| Suction Cup        | 1 |

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

## Specifications

|                               |                     |
|-------------------------------|---------------------|
| Measurements:                 | 475x137x70 mm       |
| Net weight:                   | 2.48 kg             |
| Quadruple                     |                     |
| Body:                         | Gypsum              |
| Illuminant:                   | LED                 |
| Electrical safety class:      | II                  |
| Degree of protection:         | IP20                |
| Rated power:                  | 31.2 w              |
| Luminaire luminous flux*:     | 2204 lm             |
| Light output*:                | 71 lm/w             |
| Colorful temperature*:        | 3000 K              |
| Color rendering index*:       | Ra >90              |
| Color temperature stability*: | MAC 3               |
| cos *:                        | 0.4                 |
| PRA:                          | Mean Well APC-8-250 |

All parameters marked with \* are calculated values.  
Zenith uses tried and tested components from leading suppliers.  
However, it is possible for some LED technology-related faults to occur over the life of the product.  
  
\*\* — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.