
# Trimless recessed luminaire

30°

30°

## Tetro S05 44W 927 ze11009703

×

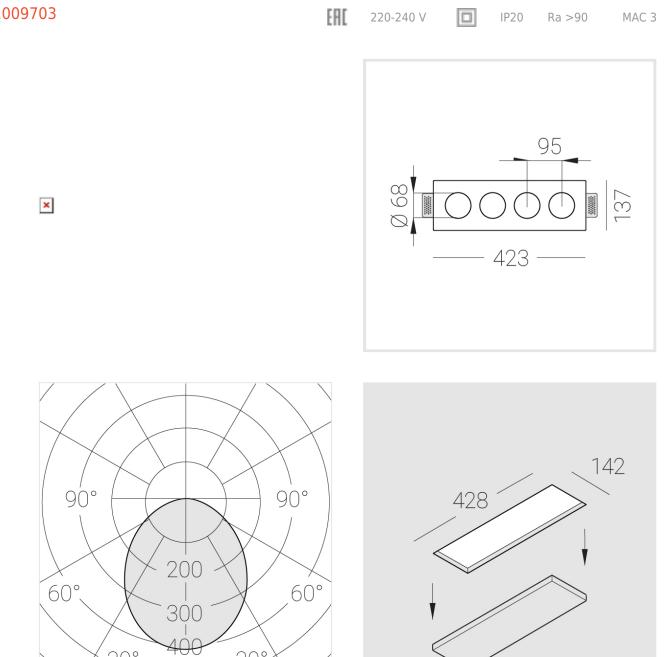

×

### Complectation

Body	1
LED module	4
Conrol gear	4
Fastener	2
Screw x6	4
Screw self-tapping	2
Washer D5	4
Suction Cup	1

#### Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

#### Specifications

Measurements: Net weight:	420x137x50 mm 2.08 kg
Quadruple Body: Illuminant:	Gypsum LED
numnant.	
Electrical safety class:	II
Degree of protection:	IP20
Rated power:	44.8 w
Luminaire luminous flux*:	3070 lm
Light output*:	69 lm/w
Colorful temperature*:	2700 K
Color rendering index*:	Ra >90
Color temperature stability*:	MAC 3
cos *:	0.5
PRA:	Mean Well APC-12-350

All parameters marked with \* are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 $^{\ast\ast}$  — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.

zenit-stp.com