## Suspension luminaire


#### ×

D250; D78x65 mm

3.93 kg

# Orby Al RAL 8W 930 DW ze34001319



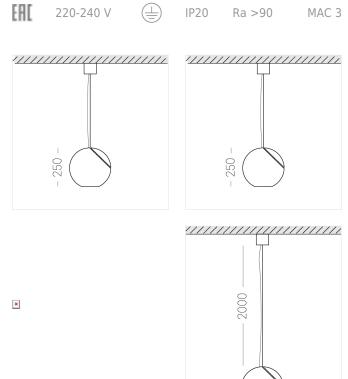

#### Complectation

Body	1
LED module	1
Conrol gear	1
Ceiling attachment	1
Suspension cord	1
Cable	1
Metal cup	1

#### Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

### **Specifications**

Measurements:

Net weight:

Sphere	
Body:	Gypsum
Illuminant:	LED
Electrical safety class:	I
Degree of protection:	IP20
Rated power:	8.7 w
Luminaire luminous flux*:	739 lm
Light output*:	85 lm/w
Colorful temperature*:	3000 K
Color rendering index*:	Ra >90
Color temperature stability*:	MAC 3
cos *:	0.92
PRA:	LC 10/150-400/40 bDW SC PRE2

All parameters marked with \* are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 $\ensuremath{^{**}}$  — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.

© Zenit STP zenit-stp.com