

# Suspension luminaire

Liny Q RAL L200 8W 830 DW

ze34001506







220-240 V



IP20

Ra >80

MAC 3

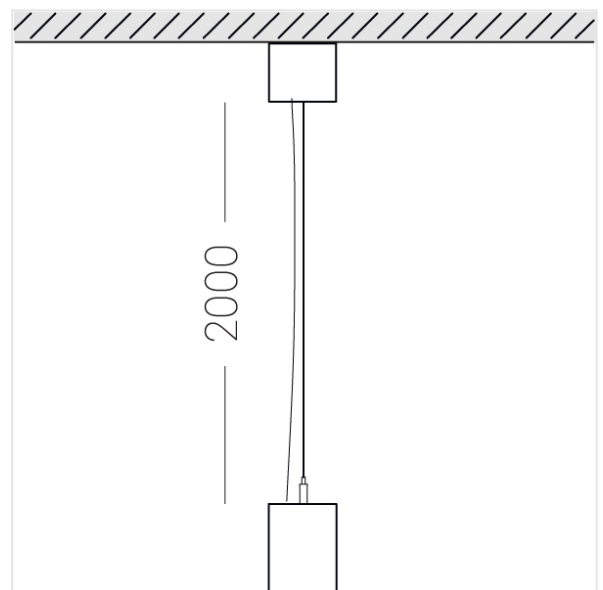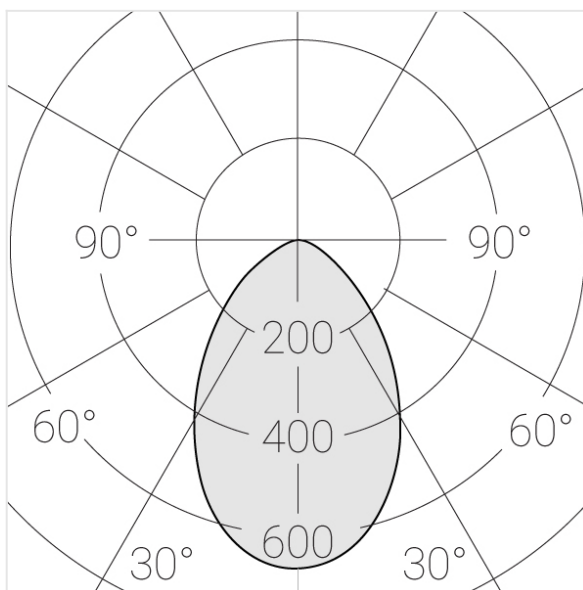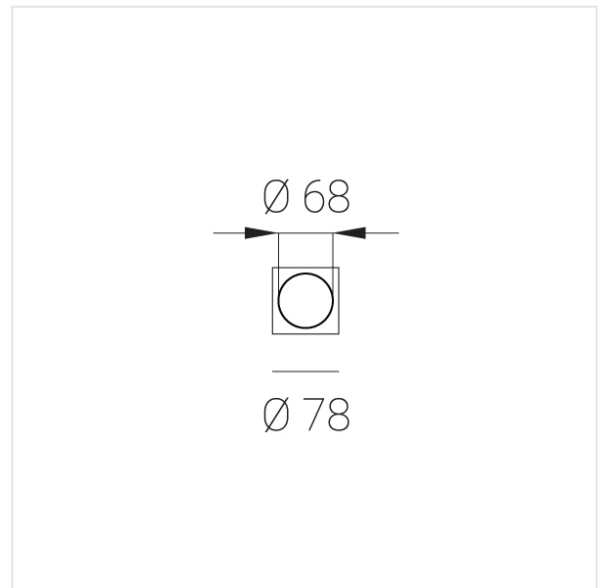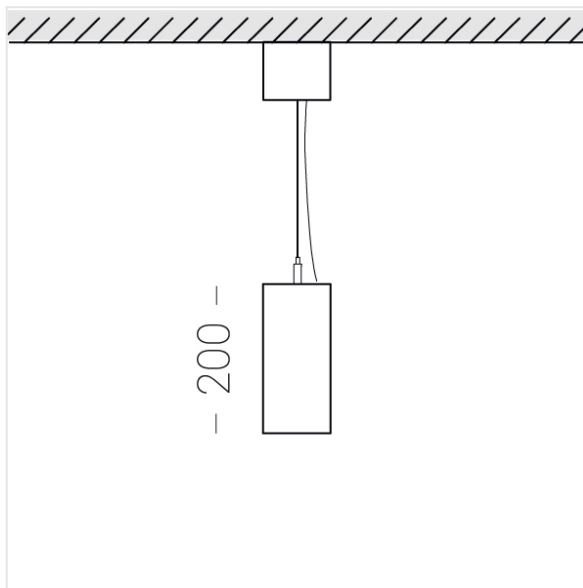

## Complectation

|                    |   |
|--------------------|---|
| Body               | 1 |
| LED module         | 1 |
| Conrol gear        | 1 |
| Ceiling attachment | 1 |
| Suspension cord    | 1 |
| Cable              | 1 |

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

## Specifications

|                               |                              |
|-------------------------------|------------------------------|
| Measurements:                 | 78x78x200; 78x78x65 mm       |
| Net weight:                   | 1.1 kg                       |
| Tube square                   |                              |
| Body:                         | Gypsum                       |
| Illuminant:                   | LED                          |
| Electrical safety class:      | I                            |
| Degree of protection:         | IP20                         |
| Rated power:                  | 8.1 w                        |
| Luminaire luminous flux*:     | 508 lm                       |
| Light output*:                | 63 lm/w                      |
| Colorful temperature*:        | 3000 K                       |
| Color rendering index*:       | Ra >80                       |
| Color temperature stability*: | MAC 3                        |
| cos *:                        | 0.95                         |
| PRA:                          | LC 10/150-400/40 bDW SC PRE2 |

All parameters marked with \* are calculated values.  
Zenith uses tried and tested components from leading suppliers.  
However, it is possible for some LED technology-related faults to occur over the life of the product.  
  
\*\* — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.