
Trimless recessed luminaire

Luno Quadro C50 100x100 17W 927 DA ze11005236



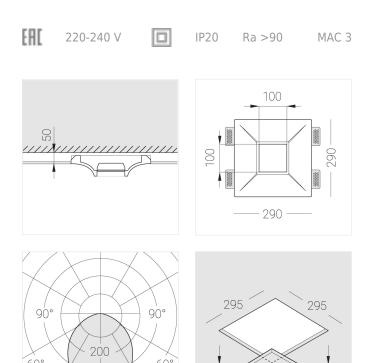

60°

Tenit-

Complectation

Body	1
LED module	1
Conrol gear	1
Fastener	4
Screw x6	8
Screw self-tapping	4
Washer D5	8

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

30°

300 <u>40</u>f

30

60°.

Measurements: Net weight:	290x290x88 mm 2.66 kg
Square Body: Illuminant:	Gypsum LED
Electrical safety class:	11
Degree of protection:	IP20
Rated power:	17.1 w
Luminaire luminous flux*:	1285 Im
Light output*:	75 lm/w
Colorful temperature*:	2700 K
Color rendering index*:	Ra >90
Color temperature stability*:	MAC 3
cos *:	0.88
PRA:	LCAI 15W 150mA-400mA ECO slim

All parameters marked with * are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 $\ast\ast$ — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.