Suspension luminaire


Schil


D250; D78x65 mm


LC 8/180/44 fixC SC SNC2

3.84 kg

Orby Cu RAL 8W 940 ze34001215

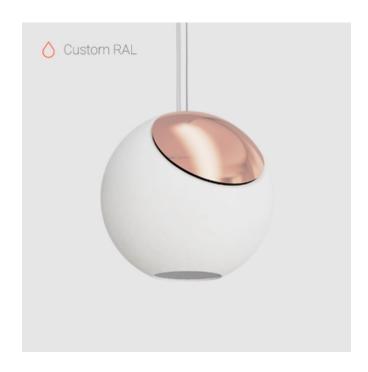





60°

Complectation

Body	1
LED module	1
Conrol gear	1
Ceiling attachment	1
Suspension cord	1
Cable	1
Metal cup	1

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

Measurements: Net weight:

60°

Sphere Body: Illuminant:	Gypsum LED
Electrical safety class:	1
Degree of protection:	IP20
Rated power:	8 w
Luminaire luminous flux*:	797 lm
Light output*:	100 lm/w
Colorful temperature*:	4000 K
Color rendering index*:	Ra >90
Color temperature stability*:	MAC 3
cos *:	0.5

All parameters marked with * are calculated values.

Zenith uses tried and tested components from leading suppliers.

However, it is possible for some LED technology-related faults to occur over the life of the product.

 $\ast\ast$ — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.

© Zenit STP zenit-stp.com

PRA: