

Suspension luminaire

Schil

MAC 3


Orby Cu RAL 8W 840 DW ze34001217

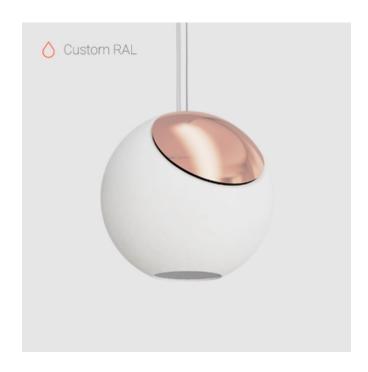




220-240 V


EHE



Ra >80

IP20





Complectation

Body	1
LED module	1
Conrol gear	1
Ceiling attachment	1
Suspension cord	1
Cable	1
Metal cup	1

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

Measurements:	D250; D78x65 mm
Net weight:	3.93 kg

Sphere

Body: Gypsum Illuminant: LED

Electrical safety class: Degree of protection: IP20 Rated power: 8.7 w 923 lm Luminaire luminous flux*: Light output*: 106 lm/w Colorful temperature*: 4000 K Color rendering index*: Ra >80 Color temperature stability*: MAC 3 cos *: 0.92 PRA: LC 10/150-400/40 bDW SC PRE2

All parameters marked with * are calculated values.

Zenith uses tried and tested components from leading suppliers.

However, it is possible for some LED technology-related faults to occur over the life of the product.

 $\ast\ast$ — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.

© Zenit STP zenit-stp.com