

## Suspension luminaire

### Schil

MAC 3


# Orby Cu RAL 8W 927 DW ze34001218

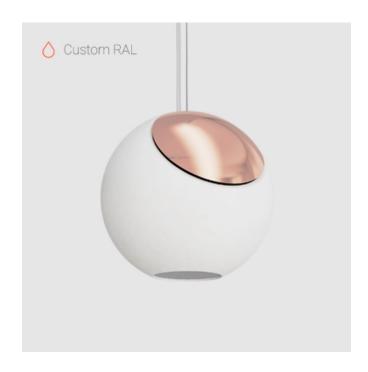




220-240 V


EHE



Ra >90

IP20





#### Complectation

Body	1
LED module	1
Conrol gear	1
Ceiling attachment	1
Suspension cord	1
Cable	1
Metal cup	1

#### Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

#### **Specifications**

Measurements:	D250; D78x65 mm
Net weight:	3.93 kg

Sphere

Body: Gypsum Illuminant: LED

Electrical safety class: Degree of protection: IP20 Rated power: 8.7 w Luminaire luminous flux\*: 680 lm 78 lm/w Light output\*: Colorful temperature\*: 2700 K Color rendering index\*: Ra >90 Color temperature stability\*: MAC 3 cos \*: 0.92 PRA: LC 10/150-400/40 bDW SC PRE2

All parameters marked with \* are calculated values.

Zenith uses tried and tested components from leading suppliers.

However, it is possible for some LED technology-related faults to occur over the life of the product.

 $\ast\ast$  — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.

© Zenit STP zenit-stp.com