Suspension luminaire


Schil

Gypsum


Mean Well APC-8-250

LED

Liny Q RAL L200 8W 940 ze34001505



[H[220-240 V 😑 IP20 Ra >90 MAC 3

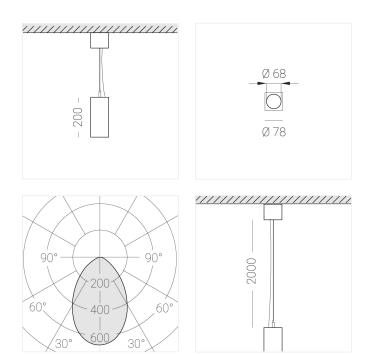

Complectation

Body	1
LED module	1
Conrol gear	1
Ceiling attachment	1
Suspension cord	1
Cable	1

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

Body:

PRA:

Illuminant:

Measurements:	78x78x200; 78x78x65 mm
Net weight:	1.02 kg
Tube square	

Electrical safety class:

Degree of protection:

Rated power:

Luminaire luminous flux*:

Light output*:

Colorful temperature*:

Color rendering index*:

IP20

7.8 w
473 lm
473 lm
61.00 lm/w
61.00 lm/w
Ra >90

Color temperature stability*: MAC 3 cos *: 0.4

All parameters marked with * are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

** — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics

© Zenit STP zenit-stp.com