
Trimless recessed luminaire



Triple Q R25 33W 830 ze11010361



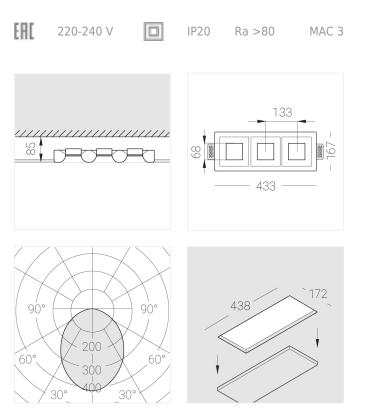

Complectation

Body	1
LED module	3
Conrol gear	3
Fastener	2
Screw x6	4
Screw self-tapping	2
Washer D5	4
Suction Cup	1

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

ents: 432x167x70 mm	nm
Gypsun LEE	
protection: IP2(protection: IP2(ver: 33.6 v luminous flux*: 2669 In ut*: 81.00 Im/v mperature*: 3000 F ering index*: Ra >80 berature stability*: MAC 3 0.5	5 w Im n/w 0 K -80 C 3 0.5
Mean Well APC	(

All parameters marked with * are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 $\ast\ast$ — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.