

# Suspension luminaire

zenit

EVO Hang OUT RAL D300 45W 830 DA  
ze37001336




220-240 V



IP20

Ra >80

MAC 3

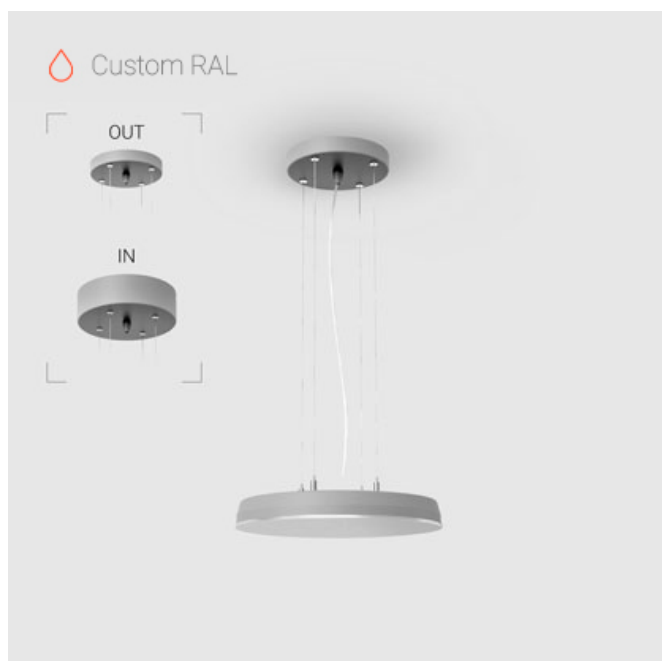

## Complectation

LED module	1
Control gear	1
Ceiling attachment	1
Suspension cord	4
Cable	1

OUT- external power supply, see installation manual.

The manufacturer reserves the right to change the configuration of the LED luminaire.

## Specifications

Measurements: D300x38; D200x60 mm

Round  
Body: Aluminum  
Illuminant: LED

Electrical safety class: II  
Degree of protection: IP20  
Rated power: 44.5 W  
Luminaire luminous flux\*: 4875 lm  
Light output\*: 110.00 lm/W  
Colorful temperature\*: 3000 K  
Color rendering index\*: Ra >80  
Color temperature stability\*: MAC 3  
cos \*: 0.96  
PRA: LCA 45W 500-1400mA one4all SR PRE

All parameters marked with \* are calculated values.  
Zenith uses tried and tested components from leading suppliers.  
However, it is possible for some LED technology-related faults to occur over the life of the product.

\*\* — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.