


Suspension luminaire на штанге



EVO Move OUT Black D300 45W 940 DA
ze77001325

220-240 V  IP20 Ra >90 MAC 3

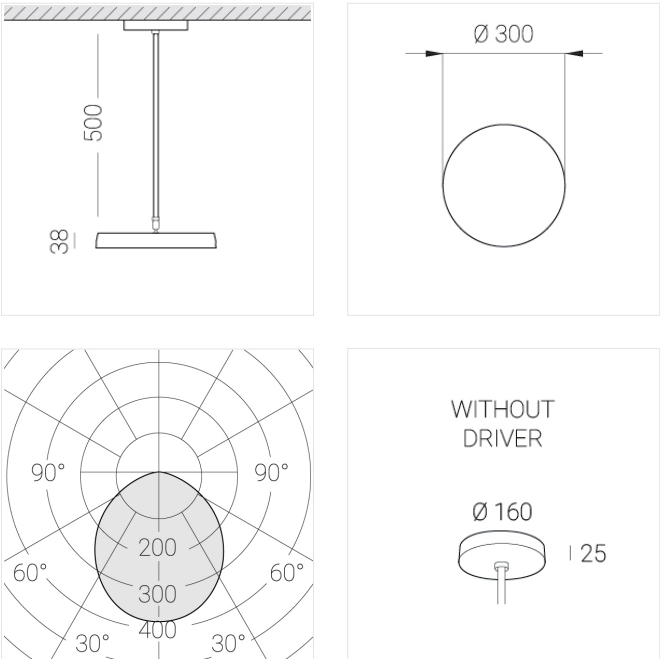

Complectation

| | |
|--------------------|---|
| LED module | 1 |
| Conrol gear | 1 |
| Fastener | 1 |
| Ceiling attachment | 1 |

OUT- external power supply, see installation manual.

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

Measurements: D300x38; D200x60 mm

| | |
|-------------|----------|
| Round | |
| Body: | Aluminum |
| Illuminant: | LED |

| | |
|-------------------------------|-----------------------------------|
| Electrical safety class: | II |
| Degree of protection: | IP20 |
| Rated power: | 44.5 w |
| Luminaire luminous flux*: | 4537 lm |
| Light output*: | 102 lm/w |
| Colorful temperature*: | 4000 K |
| Color rendering index*: | Ra >90 |
| Color temperature stability*: | MAC 3 |
| cos *: | 0.96 |
| PRA: | LCA 45W 500-1400mA one4all SR PRE |

All parameters marked with * are calculated values.
Zenith uses tried and tested components from leading suppliers.
However, it is possible for some LED technology-related faults to occur over the life of the product.

** — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.