

# Suspension luminaire на штанге

zenit

EVO Move OUT RAL D400 64W 940

ze77001380





220-240 V



IP20

Ra >90

MAC 3

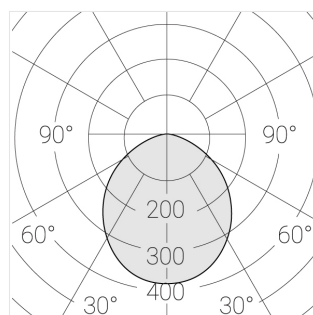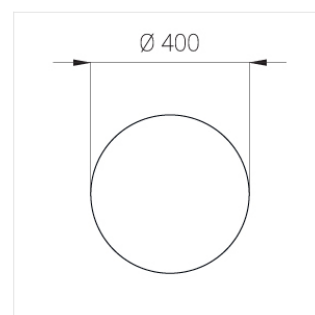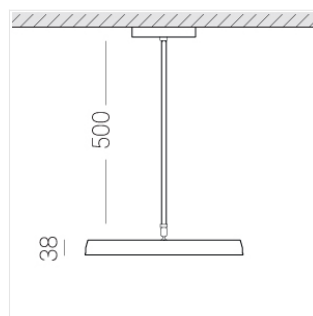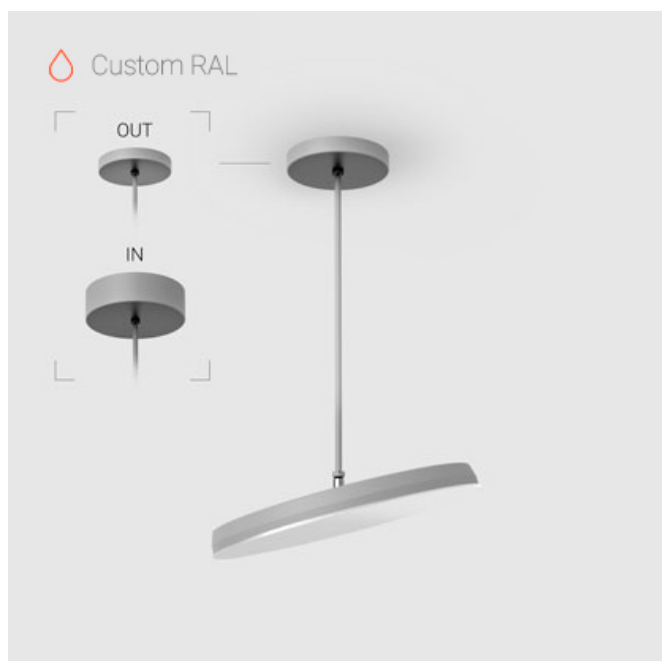

## Complectation

LED module	1
Control gear	1
Fastener	1
Ceiling attachment	1

OUT- external power supply, see installation manual.

The manufacturer reserves the right to change the configuration of the LED luminaire.

## Specifications

Measurements: D400x38; D200x60 mm

Round  
Body: Aluminum  
Illuminant: LED

Electrical safety class: II  
Degree of protection: IP20  
Rated power: 63.7 W  
Luminaire luminous flux\*: 6745 lm  
Light output\*: 106.00 lm/W  
Colorful temperature\*: 4000 K  
Color rendering index\*: Ra >90  
Color temperature stability\*: MAC 3  
cos \*: 0.97  
PRA: LC 60W 900-1750mA flexC SR EXC

All parameters marked with \* are calculated values.  
Zenith uses tried and tested components from leading suppliers.  
However, it is possible for some LED technology-related faults to occur over the life of the product.

\*\* — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.