


Suspension luminaire на штанге



EVO Move OUT RAL D400 64W 930 DA
ze77001399

220-240 V  IP20 Ra >90 MAC 3

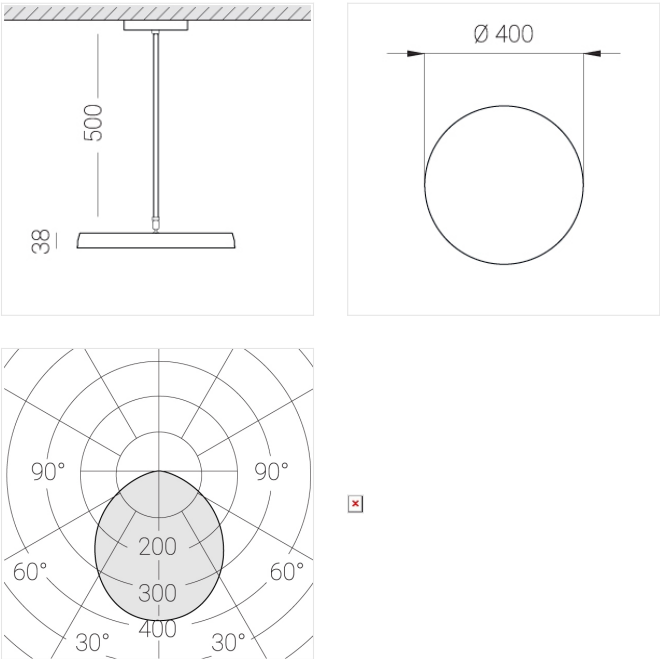

Complectation

| | |
|--------------------|---|
| LED module | 1 |
| Conrol gear | 1 |
| Fastener | 1 |
| Ceiling attachment | 1 |

OUT- external power supply, see installation manual.

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

Measurements: D400x38; D200x60 mm

| | |
|-------------|----------|
| Round | |
| Body: | Aluminum |
| Illuminant: | LED |

| | |
|-------------------------------|-----------------------------------|
| Electrical safety class: | II |
| Degree of protection: | IP20 |
| Rated power: | 63.7 w |
| Luminaire luminous flux*: | 6243 lm |
| Light output*: | 98 lm/w |
| Colorful temperature*: | 3000 K |
| Color rendering index*: | Ra >90 |
| Color temperature stability*: | MAC 3 |
| cos *: | 0.97 |
| PRA: | LCA 60W 900-1750mA one4all SR PRE |

All parameters marked with * are calculated values.
Zenith uses tried and tested components from leading suppliers.
However, it is possible for some LED technology-related faults to occur over the life of the product.

** — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.