


# Suspension luminaire на штанге



EVO Move IN RAL D550 78W 830  
ze77001136

220-240 V  IP20 Ra >80 MAC 3

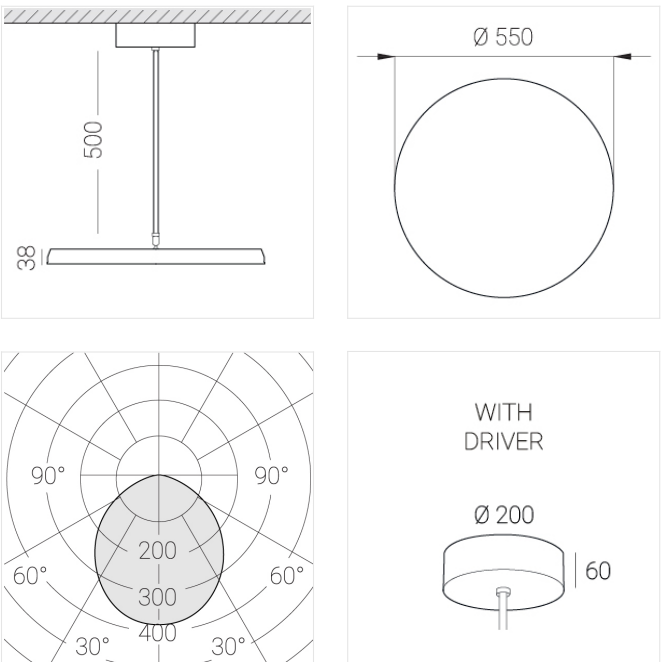

## Complectation

LED module	1
Fastener	1
Ceiling attachment	1

IN - power supply integrated into the ceiling cup, see installation manual.

The manufacturer reserves the right to change the configuration of the LED luminaire.

## Specifications

Measurements: D550x38; D160x25 mm

Round  
Body: Aluminum  
Illuminant: LED

Electrical safety class: I  
Degree of protection: IP20  
Rated power: 77.4 w  
Luminaire luminous flux\*: 9128 lm  
Light output\*: 118 lm/w  
Colorful temperature\*: 3000 K  
Color rendering index\*: Ra >80  
Color temperature stability\*: MAC 3  
cos \*: 0.95  
PRA: LC 100W 1100-2100mA flexC SR EXC

All parameters marked with \* are calculated values.  
Zenith uses tried and tested components from leading suppliers.  
However, it is possible for some LED technology-related faults to occur over the life of the product.  
\*\* — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.