## Trimless recessed luminaire

# Tetro A25 32W 830 DW ze11009651


60°.

300

400

30°

×

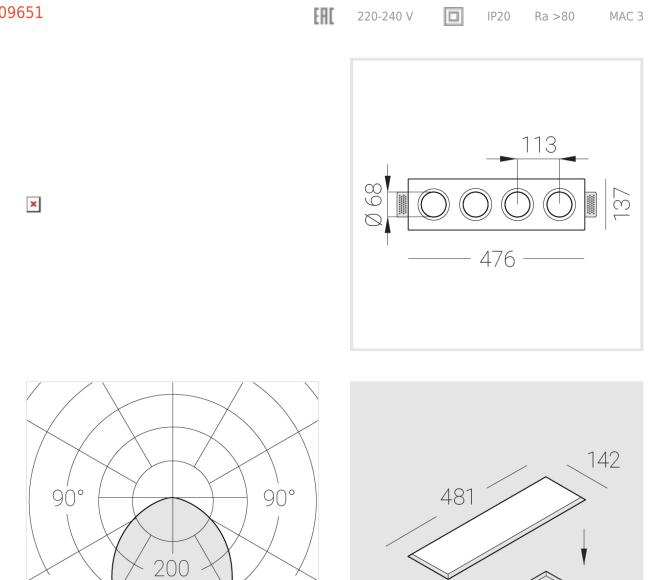

60°

30°

×

### Complectation

Body	1
LED module	4
Conrol gear	1
Fastener	2
Screw x6	4
Screw self-tapping	2
Washer D5	4
Suction Cup	1

#### Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

### Specifications

Measurements: Net weight:	475x137x70 mm 2.45 kg
Quadruple Body: Illuminant:	Gypsum LED
Electrical safety class:	11
Degree of protection:	IP20
5 1	
Rated power:	29.1 w
Luminaire luminous flux*:	2556 lm
Light output*:	88 lm/w
Colorful temperature*:	3000 K
Color rendering index*:	Ra >80
Color temperature stability*:	MAC 3
cos *:	0.94
PRA:	LCA 45W 500-1400mA one4all SC PRE

All parameters marked with \* are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 $^{\ast\ast}$  — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.

zenit-stp.com