
Trimless recessed luminaire

Simple Longy R50 100x200 16W 940 DW ze11005369





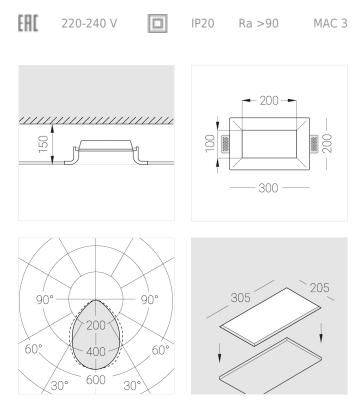

Complectation

| Body | 1 |
|--------------------|---|
| LED module | 1 |
| Conrol gear | 1 |
| Fastener | 2 |
| Screw x6 | 4 |
| Screw self-tapping | 2 |
| Washer D5 | 4 |
| | |

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

| Measurements: | 300x200x96 mm |
|-------------------------------------|------------------------------|
| Net weight: | 2.31 kg |
| Rectangular Body: Illuminant: | Gypsum LED |
| Electrical safety class: | II |
| Degree of protection: | IP20 |
| Rated power: | 16 w |
| Luminaire luminous flux*: | 1444 Im |
| Light output*: | 90.00 Im/w |
| Colorful temperature*: | 4000 K |
| Color rendering index*: | Ra >90 |
| Color temperature stability*: | MAC 3 |
| cos *: | 0.97 |
| PRA: | LC 17/250-700/50 bDW SC PRE2 |

All parameters marked with * are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 $\ast\ast$ — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.