
Trimless recessed luminaire

Simple Longy S05 100x200 23W 830 IP44 ze11005692





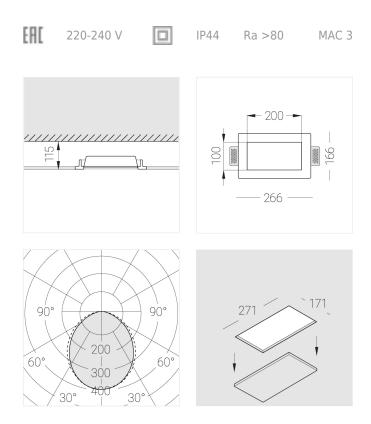

Complectation

| Body | 1 |
|--------------------|---|
| LED module | 1 |
| Conrol gear | 1 |
| Fastener | 2 |
| Screw x6 | 4 |
| Screw self-tapping | 2 |
| Washer D5 | 4 |
| | |

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

| Measurements: Net weight: | 266x166x50 mm 1.35 kg |
|-------------------------------------|---------------------------|
| Rectangular Body: Illuminant: | Gypsum LED |
| Electrical safety class: | II |
| Degree of protection: | IP44 |
| Rated power: | 22.5 w |
| Luminaire luminous flux*: | 2594 lm |
| Light output*: | 115.00 lm/w |
| Colorful temperature*: | 3000 K |
| Color rendering index*: | Ra >80 |
| Color temperature stability*: | MAC 3 |
| COS *: | 0.94 |
| PRA: | LC 21/500/42 fixC SR ADV2 |

All parameters marked with * are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 $\ast\ast$ — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.