
Trimless recessed luminaire





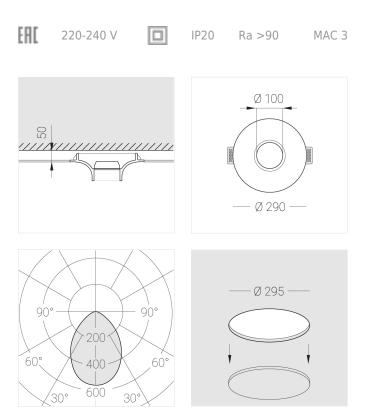

Tenit-

Complectation

| | _ |
|--------------------|---|
| Body | 1 |
| LED module | 1 |
| Conrol gear | 1 |
| Fastener | 2 |
| Screw x6 | 4 |
| Screw self-tapping | 2 |
| Washer D5 | 4 |
| | |

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

| Measurements: Net weight: | D290x123 mm 2.03 kg |
|-------------------------------|-------------------------------|
| Round Body: | Gypsum |
| Illuminant: | LED |
| Electrical safety class: | II |
| Degree of protection: | IP20 |
| Rated power: | 11.4 w |
| Luminaire luminous flux*: | 735 lm |
| Light output*: | 64.00 lm/w |
| Colorful temperature*: | 2700 K |
| Color rendering index*: | Ra >90 |
| Color temperature stability*: | MAC 3 |
| cos *: | 0.77 |
| PRA: | LCAI 15W 150mA-400mA ECO slim |

All parameters marked with * are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 $\ast\ast$ — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.