

## Trimless recessed luminaire

Luno Quadro C85 100x100 12W 940 DA ze11005279



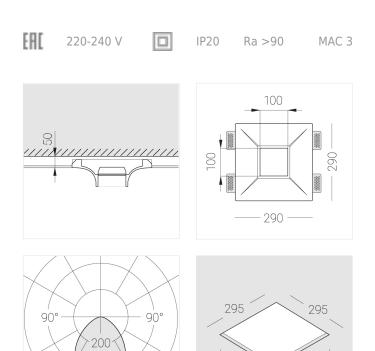

,60°

30

## Complectation

| Body               | 1 |
|--------------------|---|
| LED module         | 1 |
| Conrol gear        | 1 |
| Fastener           | 4 |
| Screw x6           | 8 |
| Screw self-tapping | 4 |
| Washer D5          | 8 |
|                    |   |

## Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

## Specifications

′30°

400

600

60°

| Measurements:<br>Net weight:   | 290x290x123 mm<br>2.84 kg     |
|--------------------------------|-------------------------------|
| Square<br>Body:<br>Illuminant: | Gypsum<br>LED                 |
| Electrical safety class:       | II                            |
| Degree of protection:          | IP20                          |
| Rated power:                   | 12.2 w                        |
| Luminaire luminous flux*:      | 942 Im                        |
| Light output*:                 | 77.00 lm/w                    |
| Colorful temperature*:         | 4000 K                        |
| Color rendering index*:        | Ra >90                        |
| Color temperature stability*:  | MAC 3                         |
| cos *:                         | 0.8                           |
| PRA:                           | LCAI 15W 150mA-400mA ECO slim |

All parameters marked with \* are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 $\ast\ast$  — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.



İ