

Trimless recessed luminaire

Tetro S05 32W 830 IP44/20 DA
ze11009851








220-240 V



IP44

Ra >80

MAC 3

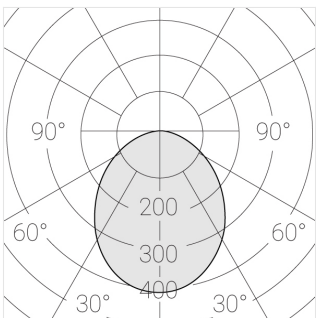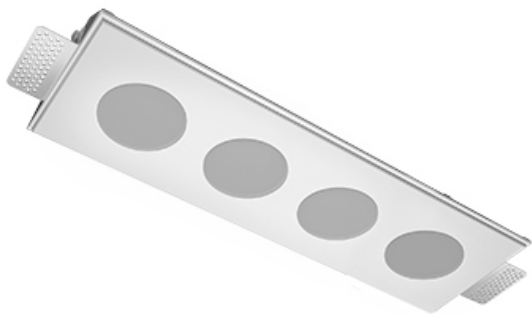

Complectation

| | |
|--------------------|---|
| Body | 1 |
| LED module | 4 |
| Conrol gear | 1 |
| Fastener | 2 |
| Screw x6 | 4 |
| Screw self-tapping | 2 |
| Washer D5 | 4 |
| Suction Cup | 1 |

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

| | |
|-------------------------------|-----------------------------------|
| Measurements: | 420x137x50 mm |
| Net weight: | 1.93 kg |
| Quadruple | |
| Body: | Gypsum |
| Illuminant: | LED |
| Electrical safety class: | II |
| Degree of protection: | IP44 |
| Rated power: | 29.1 w |
| Luminaire luminous flux*: | 2828 lm |
| Light output*: | 97.00 lm/w |
| Colorful temperature*: | 3000 K |
| Color rendering index*: | Ra >80 |
| Color temperature stability*: | MAC 3 |
| cos *: | 0.94 |
| PRA: | LCA 45W 500-1400mA one4all SC PRE |

All parameters marked with * are calculated values.
Zenith uses tried and tested components from leading suppliers.
However, it is possible for some LED technology-related faults to occur over the life of the product.

** — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.