
## Large-size trimless recessed luminaire




MAC 3

Ra >80

Simple MAX R50 D550 78W 830 ze11009091



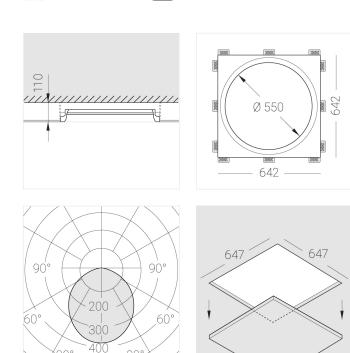

IP20

## Complectation

Body	1
LED module	1
Conrol gear	1
Fastener	12
Screw x6	24
Screw self-tapping	24
Washer D5	28
Suction Cup	2
Bracket	4
Screw M5x8	4

## Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

## **Specifications**

30°

30

EHC

220-240 V

Measurements: Net weight:	640x640x110 mm 13.69 kg
Round Body:	Gypsum
Illuminant:	LED
Electrical safety class:	Ш
Degree of protection:	IP20
Rated power:	77.4 w
Luminaire luminous flux*:	8839 lm
Light output*:	114 lm/w
Colorful temperature*:	3000 K
Color rendering index*:	Ra >80
Color temperature stability*:	MAC 3
COS *:	0.95
PRA:	LC 100W 1100-2100mA flexC SR EXC

All parameters marked with \* are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 $\ast\ast$  — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.