

# Suspension luminaire

zenit

Orby Cu RAL 8W 830

ze34001211

EAC






220-240 V



IP20

Ra >80

MAC 3

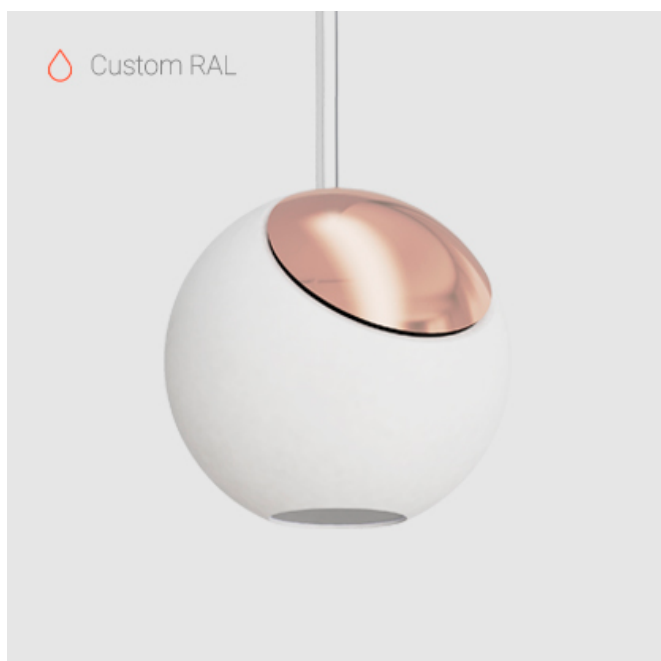

## Complectation

|                    |   |
|--------------------|---|
| Body               | 1 |
| LED module         | 1 |
| Control gear       | 1 |
| Ceiling attachment | 1 |
| Suspension cord    | 1 |
| Cable              | 1 |
| Metal cup          | 1 |

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

## Specifications

|               |                 |
|---------------|-----------------|
| Measurements: | D250; D78x65 mm |
| Net weight:   | 3.84 kg         |

|             |        |
|-------------|--------|
| Sphere      |        |
| Body:       | Gypsum |
| Illuminant: | LED    |

|                               |                          |
|-------------------------------|--------------------------|
| Electrical safety class:      | I                        |
| Degree of protection:         | IP20                     |
| Rated power:                  | 8 w                      |
| Luminaire luminous flux*:     | 856 lm                   |
| Light output*:                | 107 lm/w                 |
| Colorful temperature*:        | 3000 K                   |
| Color rendering index*:       | Ra >80                   |
| Color temperature stability*: | MAC 3                    |
| cos *:                        | 0.5                      |
| PRA:                          | LC 8/180/44 fixC SC SNC2 |

All parameters marked with \* are calculated values.  
Zenith uses tried and tested components from leading suppliers.  
However, it is possible for some LED technology-related faults to occur over the life of the product.

\*\* — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.