## Suspension luminaire

### Senit

D250; D78x65 mm


100.00 lm/w

4000 K

Ra >90

# Orby Al RAL 8W 940 ze34001315



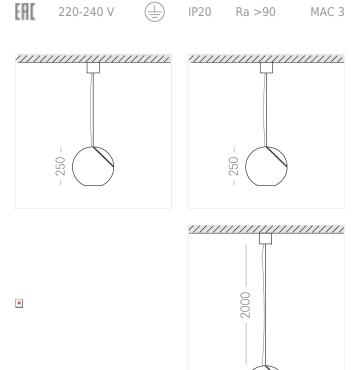

#### Complectation

Body	1
LED module	1
Conrol gear	1
Ceiling attachment	1
Suspension cord	1
Cable	1
Metal cup	1

#### Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

#### Specifications

Measurements:

Light output\*:

Colorful temperature\*:

Color rendering index\*:

Net weight:	3.84 kg
Sphere Body: Illuminant:	Gypsum LED
Electrical safety class:	I IP20
Degree of protection: Rated power:	1P20 8 w
Luminaire luminous flux*:	797 lm

Color temperature stability\*: MAC 3 cos \*: 0.5 PRA: LC 8/180/44 fixC SC SNC2

All parameters marked with \* are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 $\ensuremath{^{**}}$  — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.

© Zenit STP zenit-stp.com