
# Trimless recessed luminaire



## Triple Q S05 33W 830 IP44/20 ze11010396



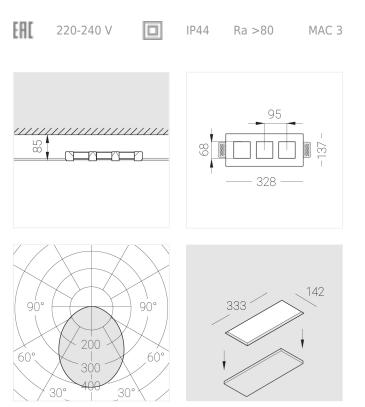

### Complectation

| Body               | 1 |
|--------------------|---|
| LED module         | 3 |
| Conrol gear        | 3 |
| Fastener           | 2 |
| Screw x6           | 4 |
| Screw self-tapping | 2 |
| Washer D5          | 4 |
| Suction Cup        | 1 |
|                    |   |

#### Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

#### **Specifications**

| Measurements:  | 328x137x50 mm  |
|--|--|
| Triple<br>Body:<br>Illuminant:   | Gypsum<br>LED  |
| Electrical safety class:<br>Degree of protection:<br>Rated power:<br>Luminaire luminous flux*:<br>Light output*:<br>Colorful temperature*:<br>Color rendering index*:<br>Color temperature stability*:<br>cos *: | II<br>IP44<br>33.6 w<br>2904 Im<br>88 Im/w<br>3000 K<br>Ra >80<br>MAC 3<br>0.5 |
| PRA:   | Mean Well APC-12-350   |

All parameters marked with \* are calculated values. Zenith uses tried and tested components from leading suppliers. However, it is possible for some LED technology-related faults to occur over the life of the product.

 $^{**}-$  the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.