

# Trimless recessed luminaire

Tetro Q A25 32W 940 IP44/20 DW  
ze11010450








220-240 V



IP44

Ra >90

MAC 3

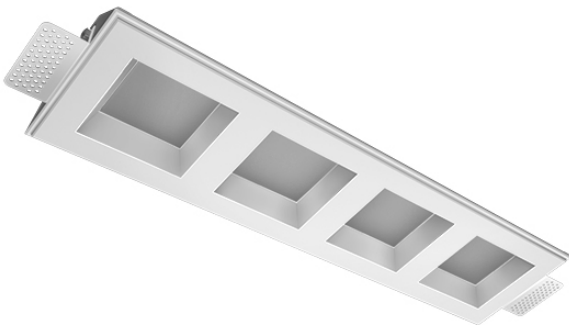

## Complectation

Body	1
LED module	4
Conrol gear	1
Fastener	2
Screw x6	4
Screw self-tapping	2
Washer D5	4
Suction Cup	1

Dimming by TRIAC accessible on request

The manufacturer reserves the right to change the configuration of the LED luminaire.

## Specifications

Measurements: 475x137x70 mm

Quadruple  
Body: Gypsum  
Illuminant: LED

Electrical safety class: II  
Degree of protection: IP44  
Rated power: 29.1 w  
Luminaire luminous flux\*: 2380 lm  
Light output\*: 84.00 lm/w  
Colorful temperature\*: 4000 K  
Color rendering index\*: Ra >90  
Color temperature stability\*: MAC 3  
cos \*: 0.95  
PRA: LCA 45W 500-1400mA one4all SC PRE

All parameters marked with \* are calculated values.  
Zenith uses tried and tested components from leading suppliers.  
However, it is possible for some LED technology-related faults to occur over the life of the product.

\*\* — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.