


# Suspension luminaire на штанге



EVO Move OUT RAL D300 45W 840 DA  
ze77001337

220-240 V  IP20 Ra >80 MAC 3

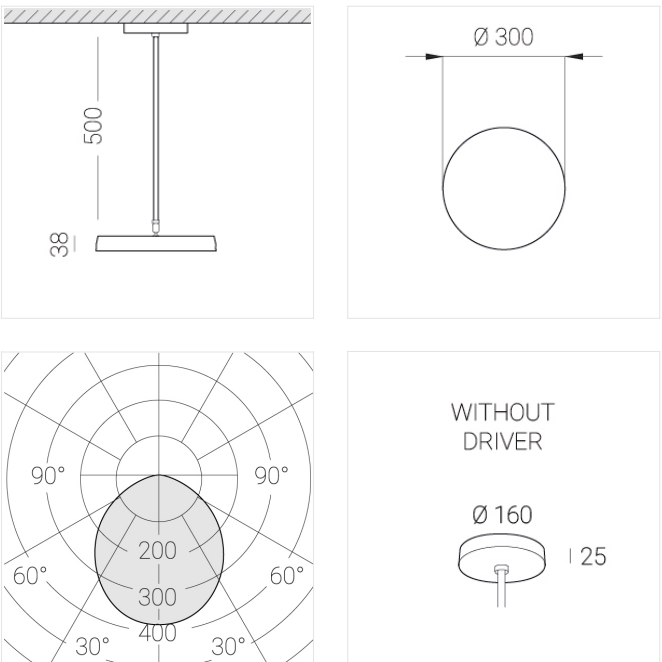

## Complectation

|                    |   |
|--------------------|---|
| LED module         | 1 |
| Conrol gear        | 1 |
| Fastener           | 1 |
| Ceiling attachment | 1 |

OUT- external power supply, see installation manual.

The manufacturer reserves the right to change the configuration of the LED luminaire.

## Specifications

|                               |                                   |
|-------------------------------|-----------------------------------|
| Measurements:                 | D300x38; D200x60 mm               |
| Round                         |                                   |
| Body:                         | Aluminum                          |
| Illuminant:                   | LED                               |
| Electrical safety class:      | II                                |
| Degree of protection:         | IP20                              |
| Rated power:                  | 44.5 w                            |
| Luminaire luminous flux*:     | 5255 lm                           |
| Light output*:                | 118 lm/w                          |
| Colorful temperature*:        | 4000 K                            |
| Color rendering index*:       | Ra >80                            |
| Color temperature stability*: | MAC 3                             |
| cos *:                        | 0.96                              |
| PRA:                          | LCA 45W 500-1400mA one4all SR PRE |

All parameters marked with \* are calculated values.  
Zenith uses tried and tested components from leading suppliers.  
However, it is possible for some LED technology-related faults to occur over the life of the product.

\*\* — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.