


Suspension luminaire на штанге



EVO Move IN RAL D400 64W 930
ze77001079

220-240 V  IP20 Ra >90 MAC 3

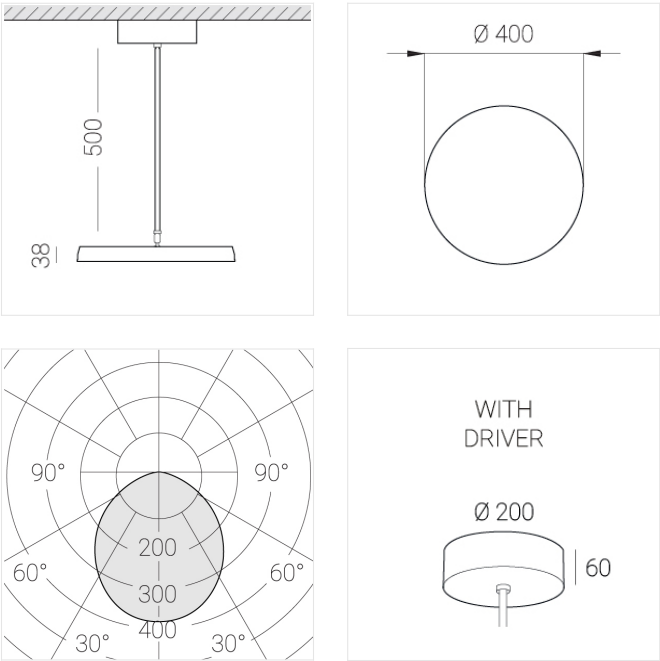

Complectation

| | |
|--------------------|---|
| LED module | 1 |
| Fastener | 1 |
| Ceiling attachment | 1 |

IN - power supply integrated into the ceiling cup, see installation manual.

The manufacturer reserves the right to change the configuration of the LED luminaire.

Specifications

Measurements: D400x38; D160x25 mm

Round
Body: Aluminum
Illuminant: LED

Electrical safety class: I
Degree of protection: IP20
Rated power: 63.7 w
Luminaire luminous flux*: 6243 lm
Light output*: 98.00 lm/w
Colorful temperature*: 3000 K
Color rendering index*: Ra >90
Color temperature stability*: MAC 3
cos *: 0.97
PRA: LC 60W 900-1750mA flexC SR EXC

All parameters marked with * are calculated values.
Zenith uses tried and tested components from leading suppliers.
However, it is possible for some LED technology-related faults to occur over the life of the product.

** — the manufacturer reserves the right to replace the power supply with a similar one with the same characteristics.